

**Skyjack Head Office**  
55 Campbell Rd.  
Guelph, ON Canada N1H 1B9

Sales Inquiries: 1-877-755-4387  
(1-877-SJLIFTS)  
Main Switchboard: 1-800-265-2738  
Tel: 519-837-0888  
Fax: 519-837-8104  
Email: skyjack@skyjack.com

[www.skyjack.com](http://www.skyjack.com)



## SJ1256 TH TELEHANDLER



SKYJACK 2 YEAR GOLD LEAF PROTECTION PROGRAM

This brochure is for illustrative purpose only and based on the latest information at the time of printing. Skyjack Inc. reserves the right to make changes at any time, without notice, to specifications, standard and optional equipment. Consult the Operating Maintenance and Parts Manuals for proper procedures. Work platforms have been tested to comply with ANSI and CSA standards as interpreted by Skyjack, Inc.

# STRONG AND SIMPLE.

The SJ1256 TH extends the principle of simple reliability that has made the TH series a renowned success. Skyjack gives you the features you need to put loads at height while promoting leading return on investment. All with Skyjack's leading 2 year warranty program.

# SIMPLE, SERVICEABLE, RELIABLE, SKYJACK.

- External extension cylinder / top mount extension chain
- Oversized engine bay with full opening fiberglass cowling
- Deutz engines, Dana powershift transmission and Dana axles
- Strong, simple and narrow main frame
- Modular cab, convert from open to closed at rental yard
- Simple control panel design consistent with Skyjack booms and engine MFD standard
- Cast rear counterweight with hitch pin incorporated as standard
- Standard yoke mount lifting hook and quick attach carriages
- Rear axle stabilization
- Axle mounted outriggers

## READYHOOK™





- Standard yoke mounted rigging hook for correct lifting of suspended loads
- Full load chart supplied for hook use. Rated to full capacity of machine
- Placed above ground level, secure from ground contact

## FLEXCAB™



- Available conversion kit to convert open cab units to closed cab in less than 2 hours with standard tools
- Bolt on/bolt off flat plane cab glass for easy and economical replacement of broken glass
- Bolt on/bolt off door hinges and drop on door for easy and economical damage repair

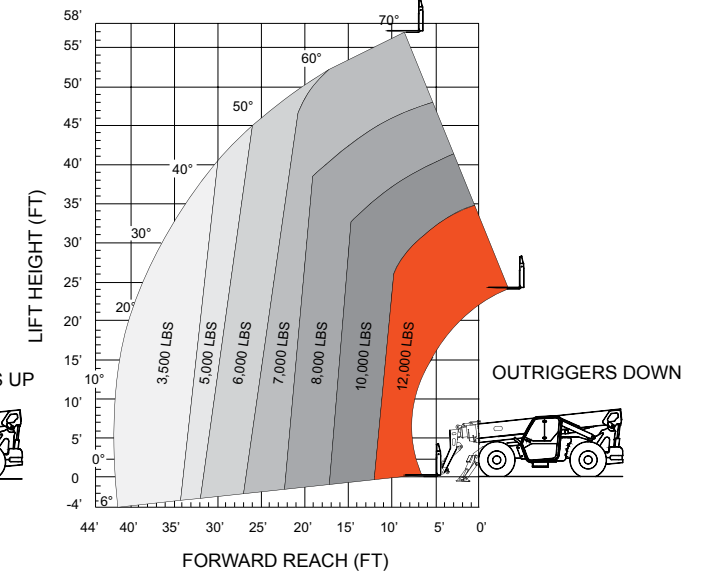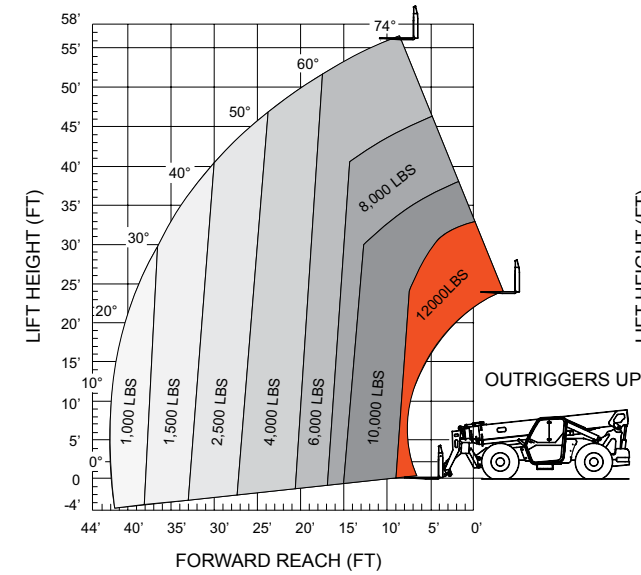

SPECIFICATIONS	SJ1256 TH
Maximum Lift Capacity	12,000 lbs (5,443 kg)
Maximum Lift Height	56' 3" (17.14 m)
Rated Lift Capacity @ Maximum Height w O/R	7,000 lbs (3,175 kg)
Maximum Forward Reach	42' 6" (12.95 m)
Rated Lift Capacity @ Maximum Reach w O/R	3,500 lbs (1,588 kg)
Engine	107hp Deutz TCD 3.6L T4F
Torque	320 lb/ft
Transmission	Dana Powershift, 3 Speed F/R
Drawbar Pull	22,500 lb
Fully Loaded Potential Gradeability	55%



† Capacities, and machine weights may differ when options are added.  
 ‡ Certain option pricing not available at time of printing.  
 Preliminary specifications at time of printing. Consult your local area sales representative for details.  
 All Skyjack warranties are subject to express limited warranty and all of other related terms, policies and procedures, as amended from time to time. Please refer to [www.skyjack.com/warranty-service](http://www.skyjack.com/warranty-service)