

# SJ45/60 AJHE+ HYBRID ELECTRIC ARTICULATING BOOMS



## STANDARD FEATURES

- 23A automatic battery charger with battery condition indicator
- 415 Ah AGM batteries
- Integrated electric traction motor brake
- Low battery warning indicator light
- SMARTORQUE™ Kubota D902 Stage V diesel engine
- EASYDRIVE™ Direction sensing drive and steer controls
- SKYRISER™ True vertical rise
- AXLDRIVE™ Axle-based 4WD system
- SKYCODED™ control system
- E-boom ECOSTART (Stop-Start system)
- Operator controlled locking rear differential and limited slip front differential
- Oscillating steer axle
- Drivable at full height
- 45% Gradeability
- Non-marking tyres
- Swing up cowlings for easy access
- Proportional controls
- Up to 454 kg capacities
- Bolt-in platform railings
- Lanyard attachment points
- Dual-entry sliding mid rails (SJ45 AJE+)
- Tri-entry sliding mid rails (SJ60 AJE+)
- Secondary Guarding Electrical (SGE)
- Overload sensing system
- Wiring for AC outlet on platform
- Tilt alarm (5.0° x 5.0°) with drive and lift cut-out
- Single point emergency lowering
- 355° Non-continuous turret rotation
- Tie down/lifting lugs
- Hourmeter
- Operator horn
- Lockable power disconnect switch



- 16% weight reduction
- 62% less fuel\*



- Reduced emissions



- 3% reduction in engine noise (excl. alarms)
- White noise alarm – *optional*



- 85% recyclable (by weight)



- E-boom ECOSTART (Stop-Start system)
- HVO compatible
- Bio-degradeable hydraulic oil – *optional*





- Telematics – Remote diagnostics reduces site visits (operational carbon footprint)


\*Compared to SJ63 AJ Stage IIIB

# SJ45/60 AJHE+ HYBRID ELECTRIC ARTICULATING BOOMS

Dimensions	SJ45 AJHE+	SJ60 AJHE+
Work Height	15.72 m	20.29 m
Platform Height	13.72 m	18.29 m
Horizontal Reach	6.93 m	11.56 m
Horizontal Work Reach	7.53 m	12.16 m
Up and Over Height	7.45 m	8.31 m
<b>A</b> Platform Size	0.76 x 1.83 m	0.91 x 2.44 m
<b>B</b> Stowed Width	2.29 m	2.44 m
<b>C</b> Tailswing	0.61 m	0.61 m
<b>D</b> Stowed Height	2.06 m	2.54 m
<b>E</b> Transportation Height	2.37 m	2.79 m
<b>F</b> Stowed Length	6.00 m	8.59 m
<b>G</b> Transportation Length	4.75 m	6.60 m
<b>H</b> Wheelbase	2.03 m	2.44 m
<b>I</b> Ground Clearance	0.39 m	0.33 m
Specifications	SJ45 AJHE+	SJ60 AJHE+
Rotation	355° NC	
Platform Rotation	170°	
Jib Length	1.40 m	1.52 m
Jib Range +/-	+70° / -75°	+65° / -60°
Weight	5,685 kg	9,125 kg
Gradeability	45%	
Turning Radius (Inside)	1.50 m	2.21 m
Turning Radius (Outside)	4.34 m	5.31 m
Axle Oscillation	12.70 cm	10.16 cm
Drive Speed (High speed)	4.8 km/h	
Capacity	300 kg	300 / 454 kg
Maximum Wind Rating	12.5 m/s	12.5 m/s
Personnel Rating at Max Wind Rating	2	2 / 3
Tyre Size	10 x 31	14 x 610
Tyre Type	N/M Solid	N/M Foam-Filled
Batteries	415 Ah AGM	
Charge Time	0–100% <15 hrs / Bulk charge to 35%–85% <2.5 hrs	
Hydraulic Reservoir	91 L	115 L
Engine	Kubota D902	

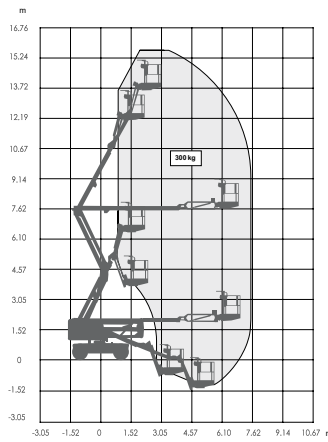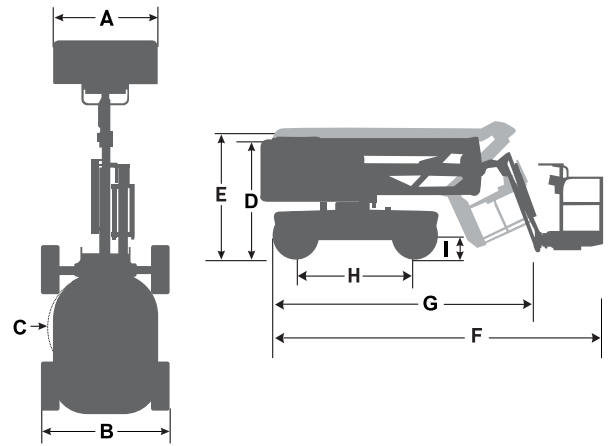

SJ45 AJHE+ WORKING ENVELOPE

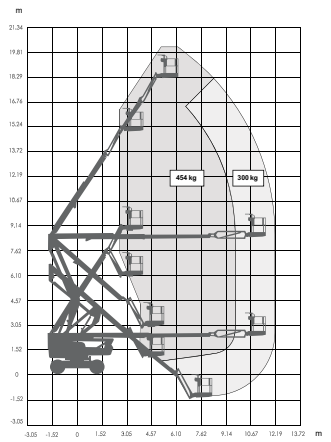

SJ60 AJHE+ WORKING ENVELOPE

## ACCESSORIES

- Glazier kit
- Pipe rack
- Tool caddy

## OPTIONS

- Flashing light
- All motion audible alarm
- 3.5kw generator as an option
- 0.91 x 1.83 m platform (SJ60 AJHE+)
- Side spring hinged entry gate (SJ45 AJHE+)
- Rear spring hinged entry gate (SJ60 AJHE+)
- Cold weather start kit

\*Recommended for regions where average monthly low temperatures can reach 14°F / -10°C (Includes engine heater, battery heat pads, and hydraulic tank heater)

- Control box cover
- Bio oil
- White noise alarm
- ELEVATE telematics

[www.skyjack.com](http://www.skyjack.com)

**Skyjack UK**  
Unit 1, Maes-y-Clawdd  
Maesbury Road Industrial Estate  
Oswestry, Shropshire, SY10 8NN  
Tel: +44 1691 676235  
Fax: +44 1691 676239  
Email: info@skyjackeurope.co.uk

**Skyjack SAS (France)**  
74 Rue Sibert  
F-42400 Saint Chamond  
France  
Tel: +33 (0) 4 78 73 53 32  
Fax: +33 (0) 4 78 56 52 42

**Skyjack Hebebühnen GmbH (Germany)**  
Därmanbusch 2a  
D-58456 Witten  
Tel: +49 (0) 2302 20 26 909  
Fax: +49 (0) 2302 20 25 671

**Skyjack AB (Sweden)**  
Agnesbergsvägen 28  
424 38 Agnesberg  
Sweden  
Tel: +46 (0) 31 21 22 45  
Fax: +46 (0) 31 787 65 10

