

Increases working height and productivity.

Skyjack's XStep maximises reach and productivity by providing operators with safe, increased access into and around tight, restricted spaces, such as ceiling openings and ceiling mounted structures.

- Improves accessibility in restricted areas
- Increases fleet flexibility
- Full height platform rails provide operator security
- One person installation process and no special tools or lifting equipment required
- Access to upper controls with XStep deployed or stowed
- Installed or removed in 5 minutes
- Available as a factory fit or field install option










KEY FEATURES

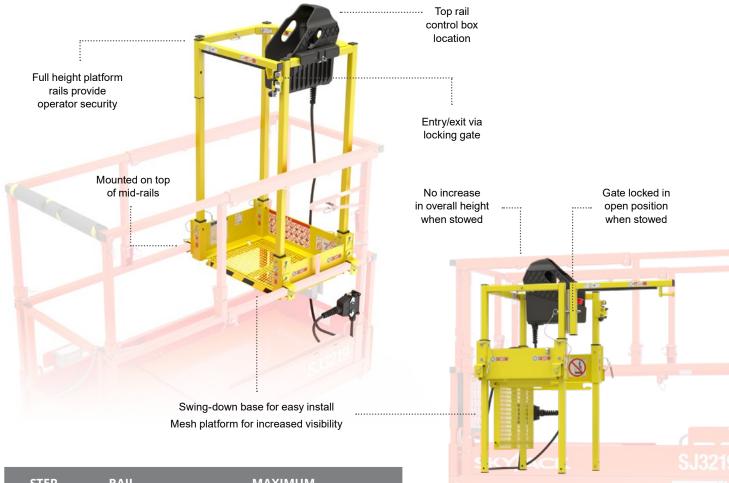

STEP HEIGHT	RAIL HEIGHT	WEIGHT [‡]	MAXIMUM CAPACITY	PERSON
48 cm	1.15 m	35 kg	113 kg	1

STOWED	OVERALL DIMENSIONS (TOP RAIL, EXTERNAL)	PLATFORM	WIND
HEIGHT		AREA	RATING
0.97 m	0.51 m x 0.58 m	0.26 m ²	0 m/s

 $^{^*\}mbox{Compatible}$ with the following models: SJ3215, SJ3219



SKYJACK AUSTRALIA, PTY LTD

Unit 1, 35 Honeycomb Drive Eastern Creek, NSW 2766 Australia

Tel: +61 (0) 2 9854 0700 Email: ausoffice@skyjack.com



[‡]3 piece design for easy handling