




SKYJACK
simply reliable

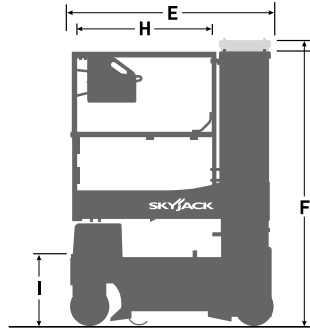

SJ12/16/20 E

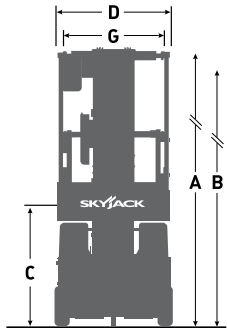

	A	B	C	D
SJ12 E	18' (5.48 m)	12' (3.66 m)	30" (0.76 m)	30.5" (0.77 m)
SJ16 E	21' 6" (6.55 m)	15' 6" (4.72 m)	30" (0.76 m)	30.5" (0.77 m)
SJ20 E	25' 6" (7.77 m)	19' 6" (5.94 m)	30" (0.76 m)	31.5" (0.80 m)





	E	F	G	H	I
SJ12 E	54" (1.37 m)	74" (1.88 m)	27" (0.69 m)	36" (0.91 m)	18" (0.46 m)
SJ16 E	54" (1.37 m)	74" (1.88 m)	27" (0.69 m)	36" (0.91 m)	18" (0.46 m)
SJ20 E	54" (1.37 m)	79.5" (2.0 m)	27" (0.69 m)	36" (0.91 m)	18" (0.46 m)



SJ12 E	2 mph (3 km/h)	2,012 lbs (913 kg)	25%	500 lbs (227 kg)	1
SJ16 E	2 mph (3 km/h)	2,054 lbs (931 kg)	25%	500 lbs (227 kg)	1 (Optional up to 12' (3.65 m))
SJ20 E	2 mph (3 km/h)	2,440 lbs (1,107 kg)	25%	350 lbs (159 kg)	1 (Optional up to 13' (3.96 m))

SJ3213/19 micro

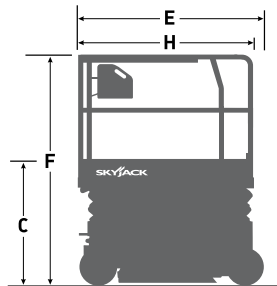

SJ3213 micro	19' (5.8 m)	13' (3.96 m)	32" (0.81 m)	32" (0.81 m)
SJ3219 micro	24' 1" (7.3 m)	18' 1" (5.5 m)	36" (0.91 m)	32" (0.81 m)





SJ3213 micro	60" (1.5 m)	75.8" (1.9 m)	27.5" (0.7 m)	60" (1.5 m)	20" (0.5 m)
SJ3219 micro	60" (1.5 m)	79.5" (2.0 m)	27.5" (0.7 m)	60" (1.5 m)	20" (0.5 m)




SJ3213 micro	2.1 mph (3.4 km/h)	1,897 lbs (861 kg)	25%	500 lbs (227 kg)	1 (Up to 12' (3.65 m))
SJ3219 micro	2.1 mph (3.4 km/h)	2,675 lbs (1,214 kg)	25%	500 lbs (227 kg)	1 (Up to 16' (4.87 m))

SJ3215/19 E



SJ3215 E	20' 7" (6.27 m)	14' 7" (4.44 m)	36" (0.91 m)	32" (0.81 m)
SJ3219 E	24' 6" (7.48 m)	18' 6" (5.64 m)	41" (1.04 m)	32" (0.81 m)





SJ3215 E	71" (1.80 m)	66" (1.67 m)	26" (0.66 m)	61" (1.55 m)	3' (0.91 m)
SJ3219 E	71" (1.80 m)	79.6" (2.01 m)	26" (0.66 m)	61" (1.55 m)	3' (0.91 m)



SJ3215 E	2.1 mph (3.4 km/h)	2,570 lbs (1,166 kg)	25%	600 lbs (272 kg)	1
SJ3219 E	2.1 mph (3.4 km/h)	3,236 lbs (1,468 kg)	25%	500 lbs (227 kg)	1

SJ3220/26 E

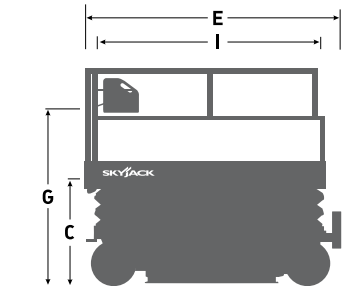

	A	B	C	D
SJ3220 E	25' 6" (7.78 m)	19' 6" (5.95 m)	39" (0.99 m)	32" (0.81 m)
SJ3226 E	31' 7" (9.62 m)	25' 7" (7.79 m)	46" (1.17 m)	32" (0.81 m)

	E	G	H	I	
SJ3220 E	91.6" (2.33 m)	69" (1.75 m)	27.5" (0.70 m)	83" (2.10 m)	3' (0.91 m)
SJ3226 E	91.6" (2.33 m)	76" (1.93 m)	27.5" (0.70 m)	83" (2.10 m)	3' (0.91 m)



SJ3220 E	2.1 mph (3.4 km/h)	3,917 lbs (1,776 kg)	25%	900 lbs (408 kg)	2
SJ3226 E	2.1 mph (3.4 km/h)	4,200 lbs (1,905 kg)	25%	500 lbs (227 kg)	1 (Up to 18' 6" (5.63 m))

SJ4726/32 E




	A	B	C	D
SJ4726 E	31' 8" (9.65 m)	25' 8" (7.82 m)	46" (1.17 m)	47" (1.20 m)
SJ4732 E	37' 8" (11.48 m)	31' 8" (9.65 m)	50" (1.27 m)	47" (1.20 m)

	E	G	H	I	
SJ4726 E	91.6" (2.33 m)	75" (1.90 m)	42" (1.07 m)	83" (2.11 m)	4' (1.2 m)
SJ4732 E	91.6" (2.33 m)	78.5" (1.99 m)	42" (1.07 m)	83" (2.11 m)	4' (1.2 m)

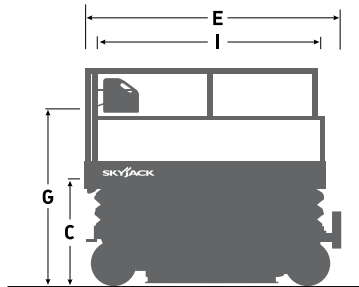


SJ4726 E	2.1 mph (3.4 km/h)	4,362 lbs (1,979 kg)	25%	1,000 lbs (454 kg)	1
SJ4732 E	2.1 mph (3.4 km/h)	5,478 lbs (2,485 kg)	25%	700 lbs (318 kg)	1



SJ4740 E

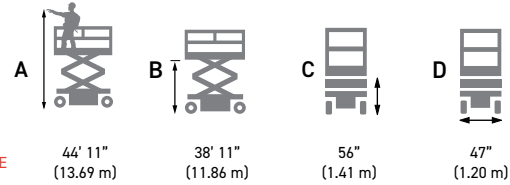

SJ4740 E



SJ4740 E

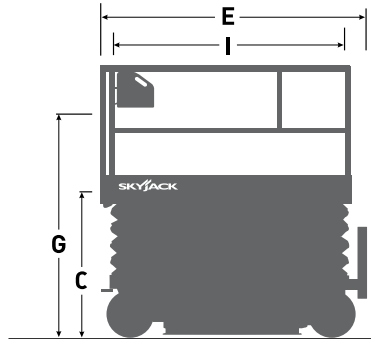

SJ4740 E

2 mph
(3.14 km/h)




6,470 lbs
(2,935 kg)

25%

770 lbs
(350 kg)

1
(Up to 24'
(7.3 m))

SJ6826/32 RT

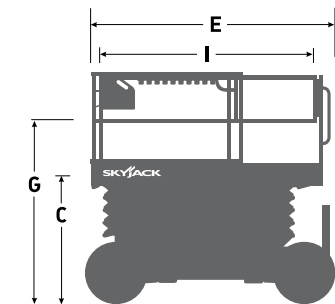

SJ6826 RT	32' (9.75 m)	26' (7.92 m)	48.5" (1.23 m)	69.5" (1.76 m)
------------------	-----------------	-----------------	-------------------	-------------------

SJ6832 RT	38' (11.58 m)	32' (9.75 m)	54" (1.37 m)	69.5" (1.76 m)
------------------	------------------	-----------------	-----------------	-------------------



SJ6826 RT	107" (2.72 m)	63.5" (1.61 m)	56" (1.42 m)	96" (2.44 m)
------------------	------------------	-------------------	-----------------	-----------------




SJ6832 RT	107" (2.72 m)	69" (1.75 m)	56" (1.42 m)	96" (2.44 m)
------------------	------------------	-----------------	-----------------	-----------------



SJ6826 RT	5' (1.52 m)	3.8 mph (6.1 km/h)	6,460 lbs (2,930 kg)	45%	1,250 lbs (567 kg)
------------------	----------------	-----------------------	-------------------------	-----	-----------------------

SJ6832 RT	5' (1.52 m)	3.8 mph (6.1 km/h)	7,590 lbs (3,443 kg)	40%	1,000 lbs (454 kg)
------------------	----------------	-----------------------	-------------------------	-----	-----------------------

SJ9233/43 RT

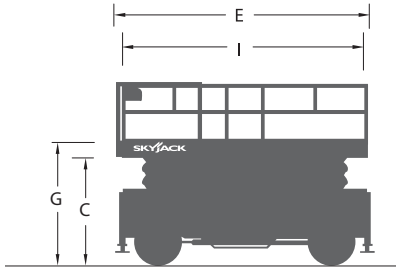


SJ9233 RT	39' (11.89 m)	33' (10.06 m)	67" (1.70 m)	90.6" (2.30 m)
------------------	------------------	------------------	-----------------	-------------------

SJ9243 RT	49' (14.94 m)	43' (13.11 m)	75.5" (1.92 m)	90.6" (2.30 m)
------------------	------------------	------------------	-------------------	-------------------



SJ9233 RT	174" (4.32 m)	77" (1.95 m)	71.65" (1.82 m)	171.7" (4.36 m)
------------------	------------------	-----------------	--------------------	--------------------




SJ9243 RT	174" (4.32 m)	85.5" (2.17 m)	71.65" (1.82 m)	171.7" (4.36 m)
------------------	------------------	-------------------	--------------------	--------------------



SJ9233 RT	5' (1.52 m)	2.5 mph (4 km/h)	13,479 lbs (6,114 kg)	40%	2,750 lbs (1,247 kg)
------------------	----------------	---------------------	--------------------------	-----	-------------------------

SJ9243 RT	5' (1.52 m)	2.5 mph (4 km/h)	14,879 lbs (6,749 kg)	40%	2,000 lbs (907 kg)
------------------	----------------	---------------------	--------------------------	-----	-----------------------

SJ9253/9664 RT

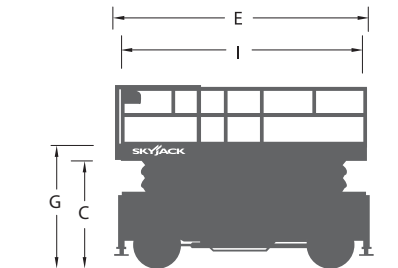


SJ9253 RT	59' (17.98 m)	53' (16.15 m)	83.5" (2.12 m)	90.6" (2.30 m)
------------------	------------------	------------------	-------------------	-------------------

SJ9664 RT	70' (21.34 m)	64' (19.51 m)	96.5" (2.45 m)	95.3" (2.42 m)
------------------	------------------	------------------	-------------------	-------------------



SJ9253 RT	174" (4.42 m)	94.5" (2.40 m)	71.65" (1.82 m)	171.7" (4.36 m)
------------------	------------------	-------------------	--------------------	--------------------


SJ9664 RT	180.5" (4.58 m)	109.5" (2.78 m)	76" (1.92 m)	172.5" (4.38 m)
------------------	--------------------	--------------------	-----------------	--------------------



SJ9253 RT	5' (1.52 m)	2.5 mph (4 km/h)	17,736 lbs (8,045 kg)	32%	1,500 lbs (680 kg)
------------------	----------------	---------------------	--------------------------	-----	-----------------------

SJ9664 RT	4.5' (1.45 m)	2.0 mph (3.2 km/h)	21,495 lbs (9,750 kg)	32%	1,130 lbs (513 kg)
------------------	------------------	-----------------------	--------------------------	-----	-----------------------

SJ30 ARJE

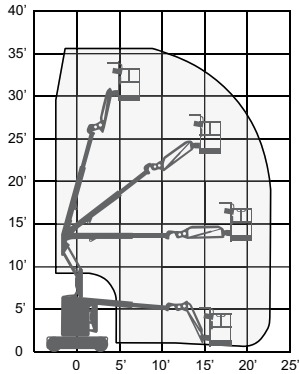


SJ30 ARJE




SJ30 ARJE

35' 6" (10.82 m)
29' 6" (9.00 m)



20' 7" (6.26 m)



13' 1" (3.99 m)



6' 6" (1.98 m)



SJ30 ARJE

47" (1.19 m)



18' 1" (5.51 m)



180°



355° NC



SJ30 ARJE


142° (+77°/-65°)



3 mph (4.8 km/h)



12,320 lbs (5,588 kg)




35%



500 lbs (227 kg)

SJ45 AJ+

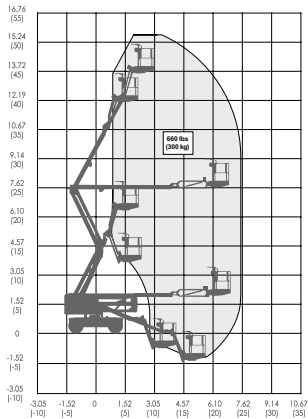


SJ45 AJ+




SJ45 AJ+

51' (15.54 m)
45' (13.72 m)



22' 9"
(6.93 m)



24' 5.25"
(7.45 m)




6' 9"
(2.06 m)



SJ45 AJ+

7' 6"
(2.29 m)



19' 8"
(6.00 m)



170°



355° NC



SJ45 AJ+

+70°/-75°



2.5 mph
(4.0 km/h)



11,190 lbs
(5,075 kg)




40%



660 lbs
(300 kg)

SJ60 AJ+

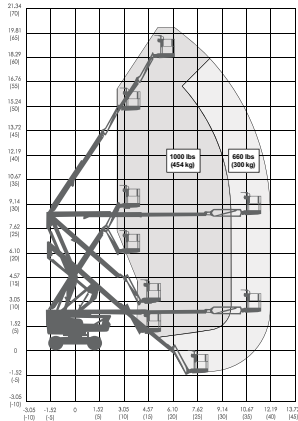


SJ60 AJ+



SJ60 AJ+

66' (20.11 m)
60' (18.29 m)



37' 11"
(11.56 m)



27' 2"
(8.31 m)




8' 4"
(2.54 m)



SJ60 AJ+

8'
(2.44 m)



28' 2"
(8.59 m)



170°



360°



SJ60 AJ+

+65°/-60°



2.5 mph
(4.0 km/h)



18,865 lbs
(8,557 kg)




40%



660 / 1,000 lbs
(300 / 454 kg)

SJ85 AJ

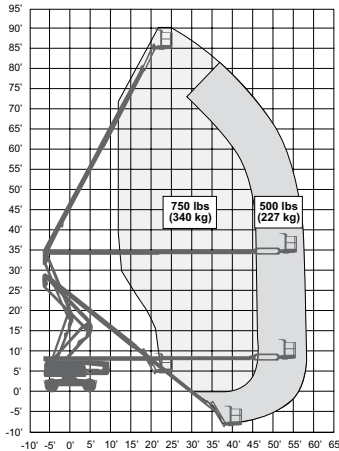


SJ85 AJ




SJ85 AJ

91' (27.74 m)
85' (25.91 m)



5'
(17.07 m)



34'
(10.36 m)




8' 9"
(2.67 m)



SJ85 AJ

8' 2"
(2.49 m)



38" 2"
(11.63 m)



170°



360°



SJ85 AJ

+65°/-60°



3 mph
(4.8 km/h)



36,300 lbs
(16,465 kg)






45%



500 / 750 lbs
(227 / 340 kg)

SJ40/45 T+

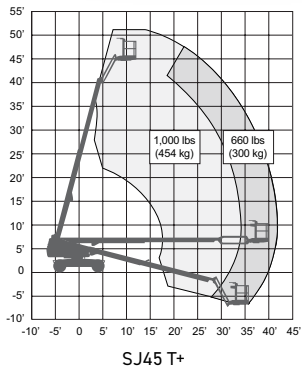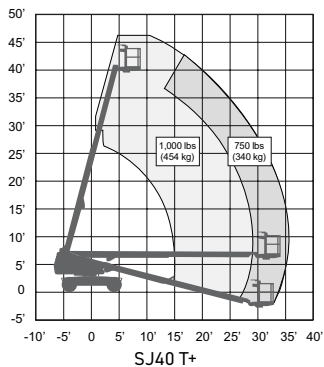

SJ40 T+

46' 7" (14.20 m)
40' 7" (12.37 m)

33' 11"
(10.34 m)

7' 10.5"
(2.40 m)

7' 6"
(2.29 m)

SJ45 T+

51' 1.5" (15.58 m)
45' 1.5" (13.75 m)

39' 8.25"
(12.10 m)

7' 10.5"
(2.40 m)

7' 6"
(2.29 m)



SJ40 T+

25' 4.25"
(7.73 m)

170°

360°

-

SJ45 T+

28' 11.5"
(8.83 m)

170°

360°

+65°/-60°



SJ40 T+

2.5 mph
(4.0 km/h)

14,805 lbs
(6,715 kg)

40%

750 / 1,000 lbs
(340 / 454 kg)

SJ45 T+


2.5 mph
(4.0 km/h)

15,780 lbs
(7,160 kg)


40%

660 / 1,000 lbs
(300 / 454 kg)


SJ61/66 T+

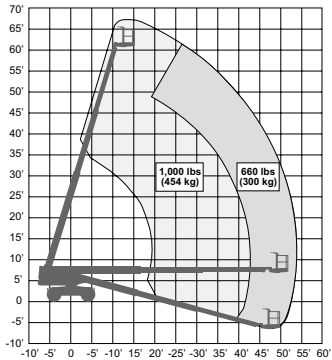

SJ61 T+

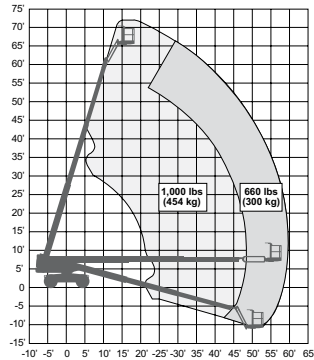

SJ66 T+



SJ61 T+

67' 8" (20.62 M)
61' 8" (18.80 M)

51' 3" (15.62 m)

8' 6" (2.59 m)

8' (2.44 m)

SJ66 T+

72' 3" (22.02 m)
66' 3" (20.19 m)

57' 0.25 (17.38 m)

8' 6" (2.59 m)

8' (2.44 m)



SJ61 T+

30' 3.75" (9.24 m)

170°

360°

-

SJ66 T+

34' 1.5 (10.40 m)

170°

360°

+65°/-60°



SJ61 T+

4.5 mph (7.2 km/h)

25,050 lbs (11,365 kg)

50%

660 / 1,000 lbs (300 / 454 kg)

SJ66 T+


4.5 mph (7.2 km/h)

27,745 lbs (12,585 kg)


50%

660 / 1,000 lbs (300 / 454 kg)


SJ82/86 T

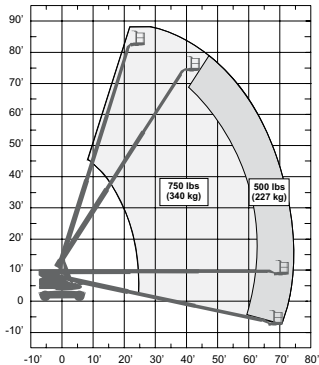

SJ82 T

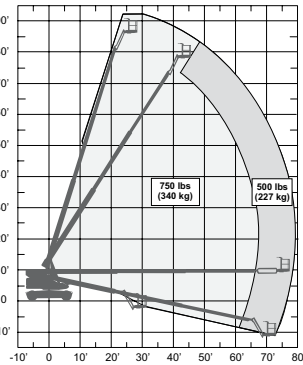

SJ86 T



SJ82 T	88' (26.82 m) 82' (24.99 m)	72' 6" (22.10 m)	9' 10" (3.00 m)	8' 2" (2.49 m)
---------------	--------------------------------	------------------	-----------------	----------------

SJ86 T	92' (28.04 m) 86' (26.21 m)	76' 10" (23.42 m)	9' 10" (3.00 m)	8' 2" (2.49 m)
---------------	--------------------------------	-------------------	-----------------	----------------



SJ82 T	37' 10" (11.53 m)	170°	360°	-
---------------	-------------------	------	------	---


SJ86 T	42' 6" (12.95 m)	170°	360°	+65°/-60°
---------------	------------------	------	------	-----------



SJ82 T	3 mph (4.8 km/h)	37,600 lbs (17,055 kg)	45%	500 / 750 lbs (227 / 340 kg)
---------------	------------------	------------------------	-----	------------------------------

SJ86 T	3 mph (4.8 km/h)	38,000 lbs (17,237 kg)	45%	500 / 750 lbs (227 / 340 kg)
---------------	------------------	------------------------	-----	------------------------------

SJ519 TH

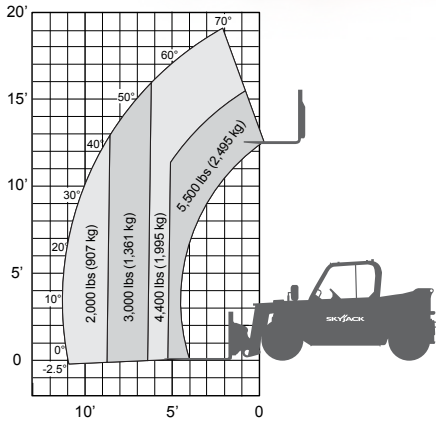


SJ519 TH




SJ519 TH


5,500 lbs
(2,495 kg)



19' 1"
(5.82m)



4,400 lbs
(1,996 kg)



SJ519 TH

11' 3"
(3.44 m)



2,000 lbs
(907 kg)




6' 4"
(1.93 m)



SJ519 TH

5' 11.5"
(1.81 m)



13' 5"
(4.09 m)




15 mph
(24 km/h)




10,600 lbs
(4,808 kg)

SJ643 TH SJ843 TH

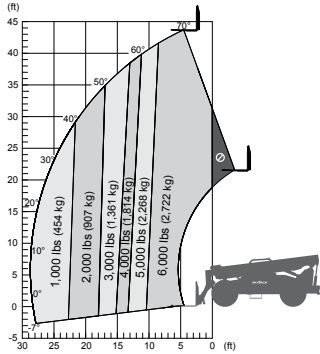

SJ643 TH

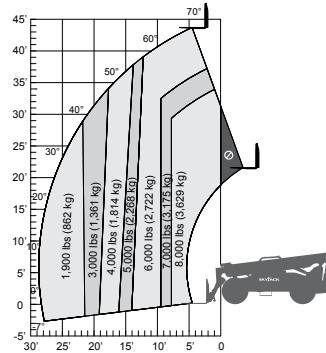


SJ843 TH

	kg/lb		kg/lb
SJ643 TH	6,000 lbs (2,722 kg)	43' 4" (13.21 m)	6,000 lbs (2,722 kg)
SJ843 TH	8,000 lbs (3,629 kg)	43' 4" (13.21 m)	6,000 lbs (2,722 kg)

SJ643 TH	28' 7" (8.71 m)	1,000 lbs (454 kg)	7' 11" (2.41 m)
SJ843 TH	28' 7" (8.71 m)	1,900 lbs (862 kg)	7' 11" (2.41 m)

			MPH KM/H	kg/lb
SJ643 TH	8' 6" (2.59 m)	19' 6" (5.94 m)	13.8 mph (22.2 km/h)	20,706 lbs (9,392 kg)
SJ843 TH	8' 6" (2.59 m)	19' 6" (5.94 m)	13.8 mph (22.2 km/h)	23,006 lbs (10,435 kg)

SJ1044 TH SJ1056 TH



SJ1044 TH

10,000 lbs
(4,535 kg)

44' 3"
(13.49 m)


7,000 lbs
(3,175 kg)

SJ1056 TH

10,000 lbs
(4,535 kg)

56' 3"
(17.14 m)

4,000 lbs (1,814 kg)
6,000 lbs (2,722 kg)*



SJ1044 TH

29' 4"
(8.94 m)

1,800 lbs
(816 kg)


8' 1"
(2.47 m)

SJ1056 TH


42' 2"
(12.85 m)

400 lbs (181 kg)
3,000 lbs (1,361 kg)*


8' 1"
(2.47 m)




SJ1044 TH

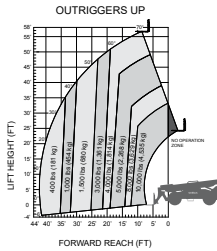

SJ1056 TH

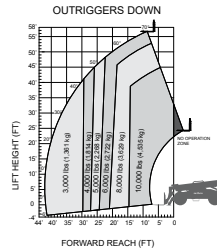

SJ1056 TH*



SJ1044 TH

8' 6"
(2.59 m)

21' 2"
(6.45 m)

15 mph
(24 km/h)

28,226 lbs
(12,803 kg)

SJ1056 TH

8' 6"
(2.59 m)

22' 2"
(6.75 m)

15 mph
(24 km/h)


33,336 lbs
(15,121 kg)

SJ1256 THS




SJ1256 THS


12,000 lbs
(5,443 kg)



56' 3"
(17.14 m)



6,000 lbs (2,722 kg)
7,000 lbs (3,175 kg)*



SJ1256 THS


42' 4"
(12.90 m)




1,000 lbs (454 kg)
3,500 lbs (1,588 kg)*



8' 6"
(2.59 m)

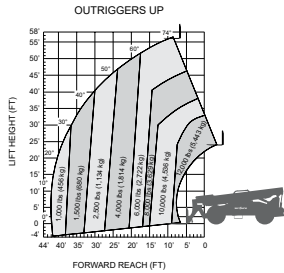

SJ1256 THS

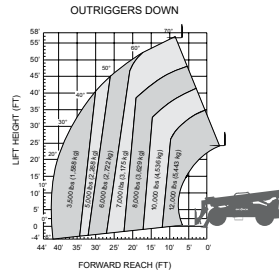


SJ1256 THS*



SJ1256 THS

8' 6"
(2.59 m)



23' 1"
(7.03 m)




15 mph
(24 km/h)



36,625 lbs
(16,613 kg)

ZB2044




ZB2044

20,000 lbs
(9,072 kg)

44' 10"
(13.67 m)

10,000 lbs (4,536 kg)
12,000 lbs (5,443 kg)*




ZB2044

27' 5"
(8.36 m)

4,000 lbs (1,814 kg)
7,000 lbs (3,175 kg)*


9'
(2.74 m)

OUTRIGGERS UP

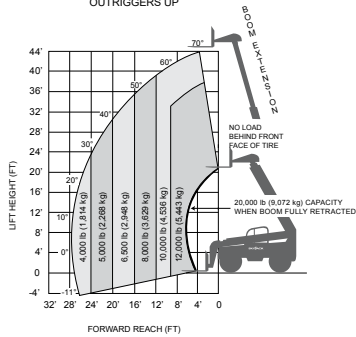


ZB2044

OUTRIGGERS DOWN

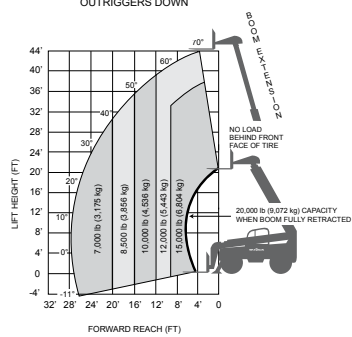

ZB2044*



ZB2044


8' 6"
(2.59 m)

20' 3"
(6.17 m)

20.5 mph
(33 km/h)

45,000 lbs
(20,412 kg)

ACCESSORYZERS™

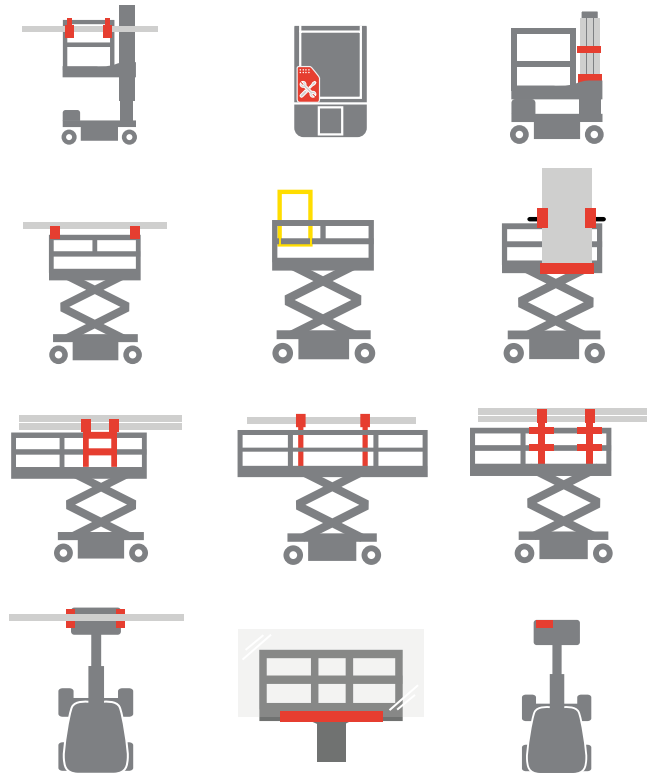

Skyjack Head Office

Skyjack Inc.
55 Campbell Rd.
Guelph, ON Canada N1H 1B9
Sales Inquiries: 1-877-755-4387 (1-877-SJLIFTS)
Main Switchboard: 1-800-265-2738
Phone: 519-837-0888
Fax: 519-837-8104
Email: skyjack@skyjack.com

Skyjack Parts & Service

Skyjack Equipment Inc.
2525 Enterprise Circle
West Chicago, IL 60185 USA
Phone: 630-262-0005
Toll Free: 1-800-275-9522
Fax: 630-262-0006
Email: parts@skyjack.com
service@skyjack.com

www.skyjack.com