


DC HEAVY DUTY PIPE RACK

For work applications where carrying capacity is critical, the heavy duty pipe rack is the ideal attachment for a safe and secure solution.

- Mounted at the rear of the platform for optimized platform space
- Carry pipe or conduit up to a maximum diameter of 4"
- Rated work load up to 593 lbs (269) kg on the pipe rack



KEY FEATURES

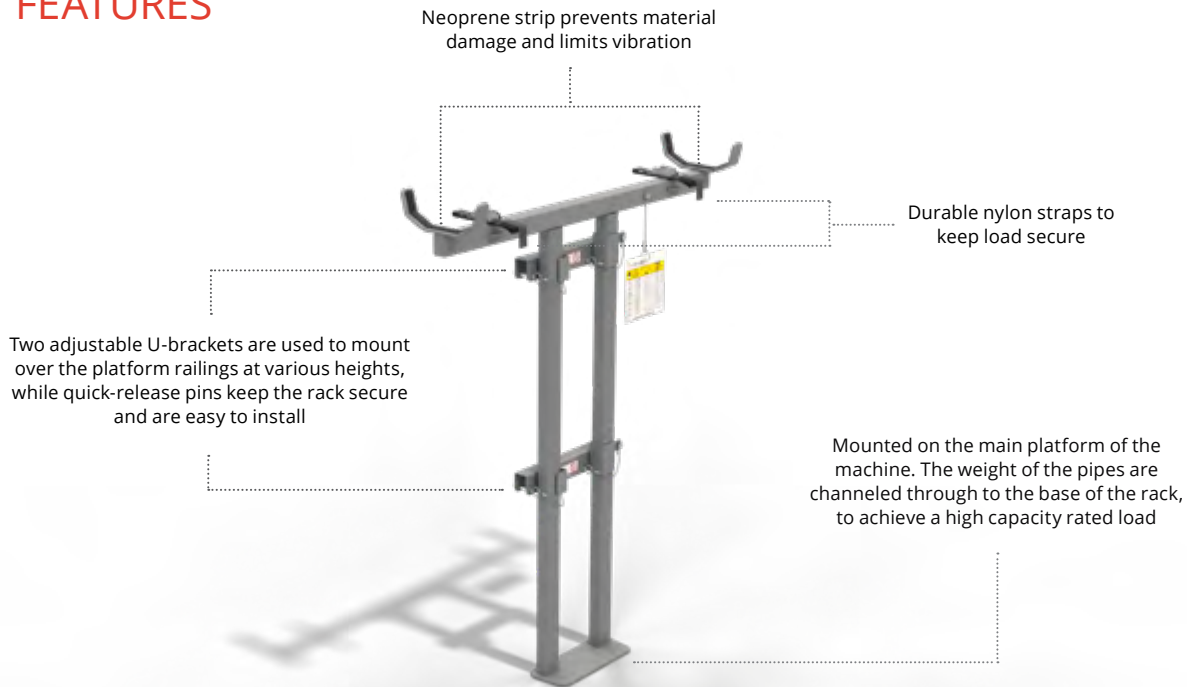

| Use only on listed models | DC HEAVY DUTY PIPE RACK | | | | | |
|---|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|
| Model | SJ3215* | | SJ3219* | | SJ3220* | SJ3226* |
| Serial Number | A/B100 000 001+ | | A/B100 000 001+ | | A/B101 000 001+ | A/B101 000 001+ |
| Rated work load on pipe rack | 185 lb (84 kg) | | 97 lb (44 kg) | 185 lb (84 kg) | 498 lb (226 kg) | 185 lb (84 kg) |
| Total rated work load including load on pipe racks | 600 lb (272 kg) 2 Persons | 600 lb (272 kg) 1 Persons | 500 lb (227 kg) 2 Persons | 500 lb (227 kg) 1 Persons | 900 lb (408 kg) 2 Persons | 500 lb (227 kg) 1 Persons |
| Maximum wind speed | 0 mph (0 m/s) | 28 mph (12.5 m/s) | 0 mph (0 m/s) | 28 mph (12.5 m/s) | 0 mph (0 m/s) | 0 mph (0 m/s) |

| | | | | | | |
|---|-------------------------------|-------------------------------|------------------------------|------------------------------|------------------------------|--|
| Model | SJ4726 ‡ | | SJ4732 ‡ | | SJ4740 ‡ | |
| Serial Number | A/B102 000 001+ | | A/B102 000 001+ | | A/B103 000 001+ | |
| Rated work load on pipe rack | 590 lb (269 kg) | | 185 lb (84 kg) | | 175 lb (80 kg) | |
| Total rated work load including load on pipe racks | 1000 lb (454 kg) 2 Persons | 1000 lb (454 kg) 1 Persons | 700 lb (317 kg) 2 Persons | 700 lb (317 kg) 1 Persons | 770 lb (350 kg) 2 Persons | |
| Maximum wind speed | 0 mph (0 m/s) | 28 mph (12.5 m/s) | 0 mph (0 m/s) | 28 mph (12.5 m/s) | 0 mph (0 m/s) | |

| | | | | | | |
|--|--|--|--|---|--|------------------------------|
| Model | SJIII 3215* | SJIII 3219* | SJIII 3220‡ | SJIII 3226‡ | SJIII 4626‡ | SJIII 4740‡ |
| Serial Number | (S/N 151982 - 154002) (S/N 10 000 001+) | (S/N 236286 - 268399) (S/N 22 000 001+) | (S/N 613551 - 615766) (S/N 60 000 001+) | (S/N 28043 - 29999) (S/N 270000 - 279956) (S/N 27 000 001+) | (S/N 710000 - 719715) (S/N 70 000 001+) | (S/N 702000001+) |
| Rated work load on pipe rack | 215 lb (98 kg) | 215 lb (98 kg) | 215 lb (98 kg) | 75 lb (34 kg) | 445 lb (202 kg) | 148 lb (67 kg) |
| Total rated work load including load on pipe rack | 550 lb (250 kg) 1 Person | 550 lb (250 kg) 1 Person | 900 lb (250 kg) 2 Persons | 500 lb (227 kg) 1 Person | 1000 lb (454 kg) 2 Persons | 500 lb (227 kg) 2 Persons |
| Maximum wind speed | 28 mph (12.5 m/s) | | | | | |

*Maximum allowable pipe length is 10 ft (3.05 m) long by 4 in (10.20 cm) diameter

‡Maximum allowable pipe length is 20 ft (6.10 m) long by 4 in (10.20 cm) diameter

Skyjack Head Office

55 Campbell Rd.
Guelph, ON Canada N1H 1B9
Sales Inquiries: 1-877-755-4387 (1-877-SJLIFTS)
Main Switchboard: 1-800-265-2738
Phone: 519-837-0888
Fax: 519-837-8104
Email: skyjack@skyjack.com

Skyjack Parts & Service

2525 Enterprise Circle
West Chicago, IL 60185 USA
Phone: 630-262-0005
Toll Free: 1-800-275-9522
Fax: 630-262-0006
Email: service@skyjack.com

www.skyjack.com